


超短フィーダー規格

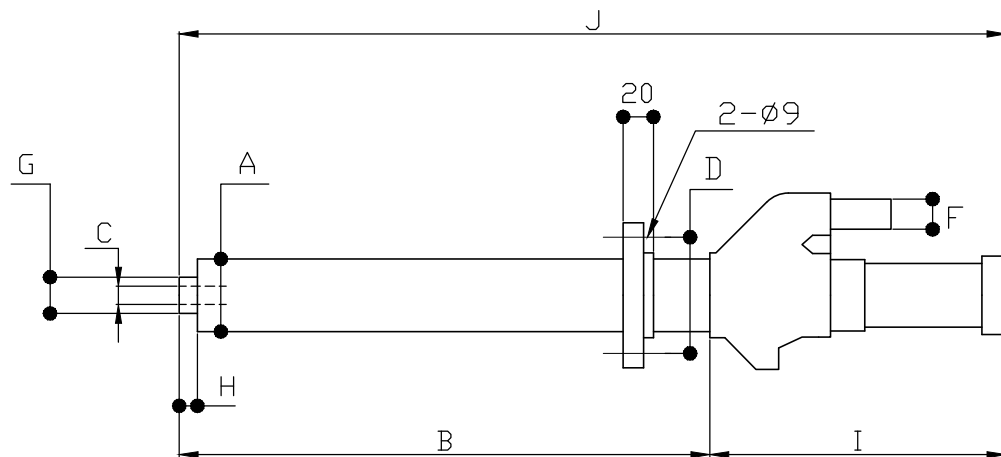

NO.	形式型番	ΦA	B	ΦC	D	E	F	ΦG	H	I	J	有効ストローク	備考
1	H2-30-200	30	200	10	55	/		/	/	217	417	180	
2	" - " -250	"	250	"	"	/		/	/	"	467	230	
3	" - " -300	"	300	"	"	/		/	/	"	517	280	
4	H2-28-200	28	200	"	65	/		/	/	"	417	180	
5	" - " -250	"	250	"	"	/		/	/	"	467	230	
6	" - " -300	"	300	"	"	/		/	/	"	517	280	
7	H2-28(15×15)-200	"	200	"	"	/		15	15	"	417	180	
8	" - " -250	"	250	"	"	/		"	"	"	467	230	
9	H2N-35-200	35	200	18	"	/		/	/	213	413	180	
10	" - " -250	"	250	"	"	/		/	/	"	463	230	
11	" - " -300	"	300	"	"	/		/	/	"	513	280	
12	" - " -350	"	350	"	"	/		/	/	"	563	330	
13	H2N-36-200	36	200	"	"	/		/	/	"	413	180	
14	" - " -250	"	250	"	"	/		/	/	"	463	230	
15	" - " -300	"	300	"	"	/		/	/	"	513	280	
16	" - " -350	"	350	"	"	/		/	/	"	563	330	
17	H2-40-250	40	250	"	75	/		/	/	192	463	230	
18	H2-40-300	"	300	"	"	/		/	/	"	513	280	