


標準フィーダー規格

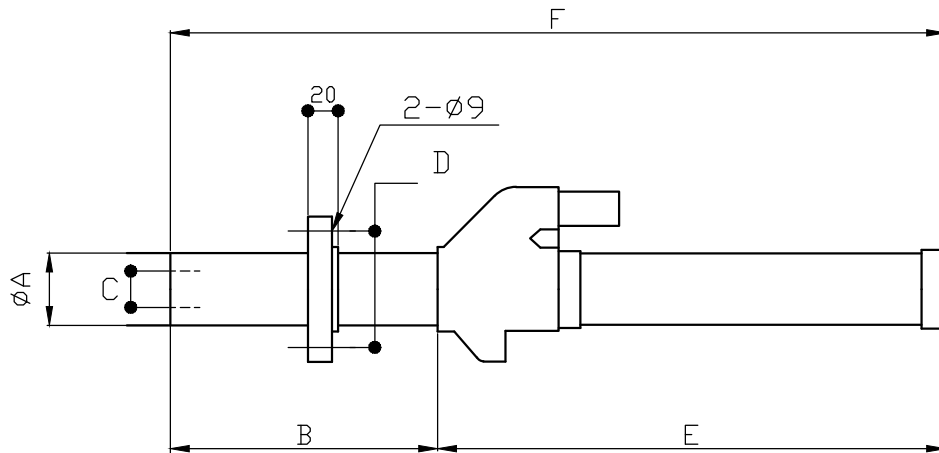

No.	形式型番	ϕA	B	ϕC	D	E	F			有効ストローク	備考
1	HG30-107.5	30	107.5	18	55	322	427			85	
2	HE30-150	"	150	"	"	345	495			130	
3	" -200	"	200	"	"	395	595			180	
4	HE28-150	28	150	"	65	345	495			130	
5	" -200	"	200	"	"	395	595			180	
6	" -250	"	250	"	"	445	695			230	
7	HE35-150	35	150	20	"	345	495			130	
8	" -200	"	200	"	"	395	595			180	
9	" -250	"	250	"	"	445	695			230	
10	" -300	"	300	18	"	495	795			280	
11	HE36-150	36	150	20	"	345	495			130	
12	" -200	"	200	"	"	395	595			180	
13	" -250	"	250	"	"	445	695			230	
14	" -300	"	300	18	"	495	795			280	
15											
16	HGP40-150	40	150	30	75	435	582			130	
17	HGP40-200	40	200	30	75	485	682			180	
18	HGP40-250	40	250	30	75	535	782			230	
19											